


2.4G BLUETOOTH, WIFI

ZIGBEE CHIP ANTENNA

  2450±50MHz

Dimensions: 3.2 x 1.6 x 1.2 mm

Clearance Area: 6.0 x 6.0 mm

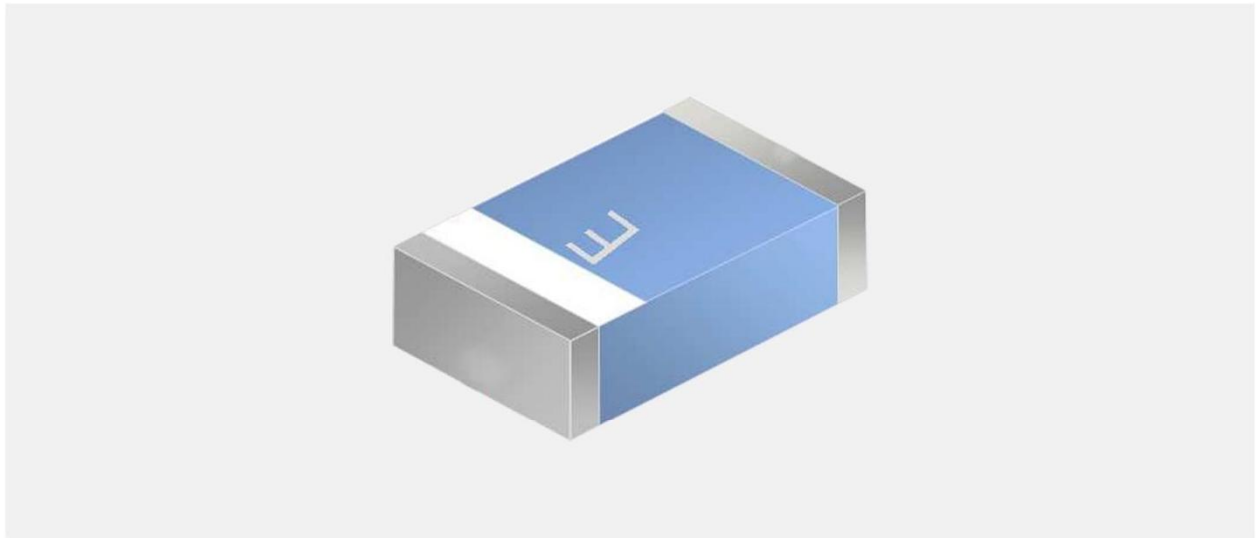

PN: M01-X100040R0A





Table of Contents

1 FEATURES & BENEFITS..... 1

2 APPLICATIONS..... 1

3 ORDER INFORMATION..... 1

4 REFERENCE GUIDE..... 2

5 EVALUATION BOARD WITH THE ANTENNA..... 2

6 MATCHING NETWORK..... 3

7 RECOMMENDED LAYOUT..... 3

8 ELECTRICAL PERFORMANCE..... 4

 8.1 VSWR and Return Loss (dB)..... 4

 8.2 Gain (dBi) and Total Efficiency (%)..... 5

 8.3 Radiation Patterns (2.4-2.5 GHz)..... 6

9 SOLDERING CONDITIONS..... 7

10 PACKAGING..... 7

 10.1 Optimal Storage Conditions for Packaged Reels..... 7

 10.2 Packagings and Dimensions (Unit: mm)..... 8

11 ANTENNA CERTIFICATION..... 9

12 WELCOME ALL ANTENNA OEM/ODM PROJECTS..... 10

www.aboosty.com

The materials provided herein, which are intended for illustration purposes only, are believed to be reliable and correct. However, no responsibility is further assumed for inaccuracies or incompleteness, and all such information shall be entirely at the user's risk. All information is subject to change without prior notice.
Copyright © 2024 ShenZhen MyAntenna RF Technology Co., Ltd. All Rights Reserved.




1 FEATURES & BENEFITS

- Low Profile
- Light Weight
- Easy to Integrate
- Intended for SMD Mounting
- Reduced Cost and Time-to-Market

2 APPLICATIONS

- Smartphones, tablets, laptops, and notebooks
- Smart home devices like home security systems
- Internet of Things (IoT), wearable devices, E-health devices
- Networking equipment like WiFi routers, WiFi extenders and repeaters
- Asset tracking, point of sale (POS) systems
- Automotive like V2X communication
- Smart city infrastructure like public WiFi hotspots, environmental monitoring

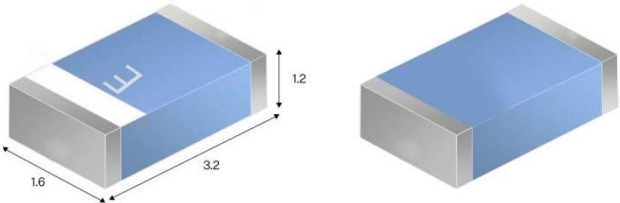Top Bottom	
	
Items	Dimensions (mm)
Length	3.2±0.1
Width	1.6±0.1
Thickness	1.2±0.1

3 ORDER INFORMATION

Product Name	2.4G Bluetooth, WIFI, ZigBee Chip Antenna
Part Number	M01-X100040R0A
Dimensions	3.2 x 1.6 x 1.2 mm
Mounting	SMT
Packaging	Tape & Reel
MOQ	2000 pcs/reel

4 REFERENCE GUIDE


Technical Features	2450±50 MHz
Input Impedance	50Ω
Peak Gain	-0.92 dBi
VSWR	<2.5
Operating Temperature	-40°C to +85°C
Power Capacity	3W
Dimensions (L x W x H)	3.1 x 1.6 x 1.2 mm
All data were measured in free space and on a reference ground plane of 45 mm length, 20 mm width, and 1.2 mm thickness. Application data might vary.	

5 EVALUATION BOARD WITH THE ANTENNA

The evaluation board provides operation at 2450±50 MHz.


Evaluation Board dimension: 45 x 20 x 1.2 mm

Clearance Area: 6.0 x 6.0 mm

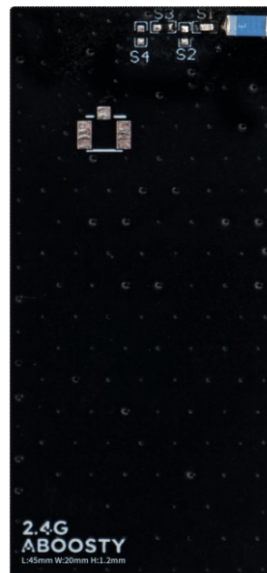


It's strongly recommended to place the antenna near the edge of the board. Maximum antenna performance is achieved by placing the antenna towards one of the corners of the PCB and with the feed point of the antenna as close to same corner of the PCB as possible.

6 MATCHING NETWORK

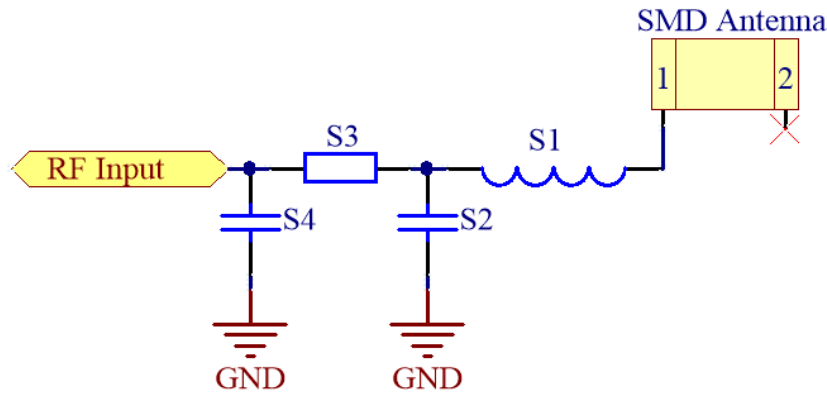

7 RECOMMENDED LAYOUT

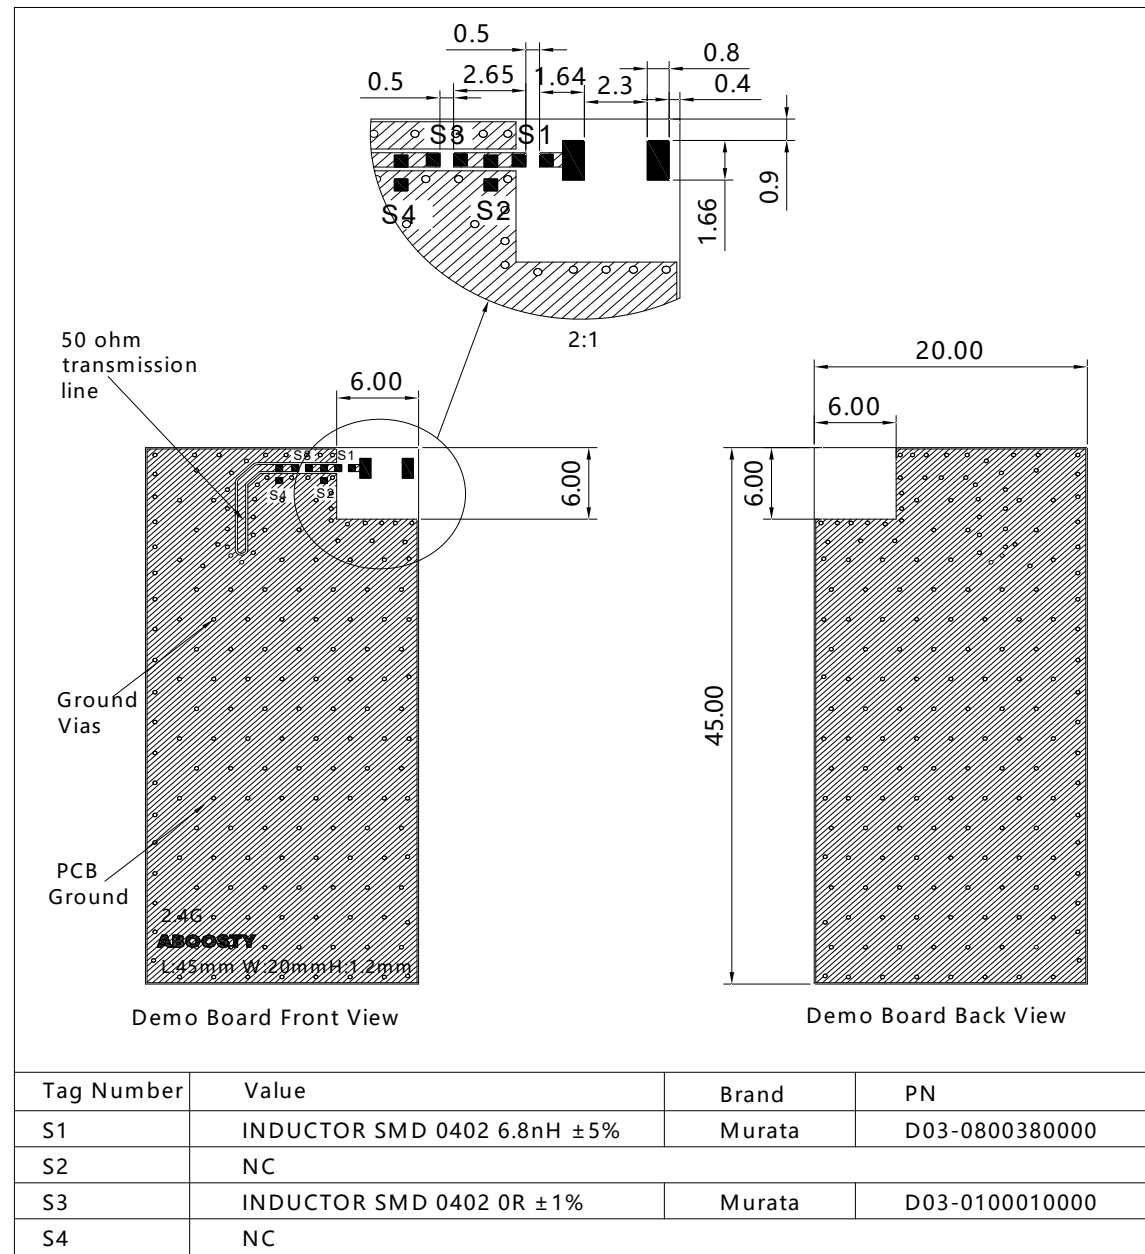


8 ELECTRICAL PERFORMANCE

© Note


The data displayed in Chapter 8 were measured in free space and on a reference ground plane of 45 mm length, 20 mm width, and 1.2 mm thickness.

8.1 VSWR and Return Loss (dB)

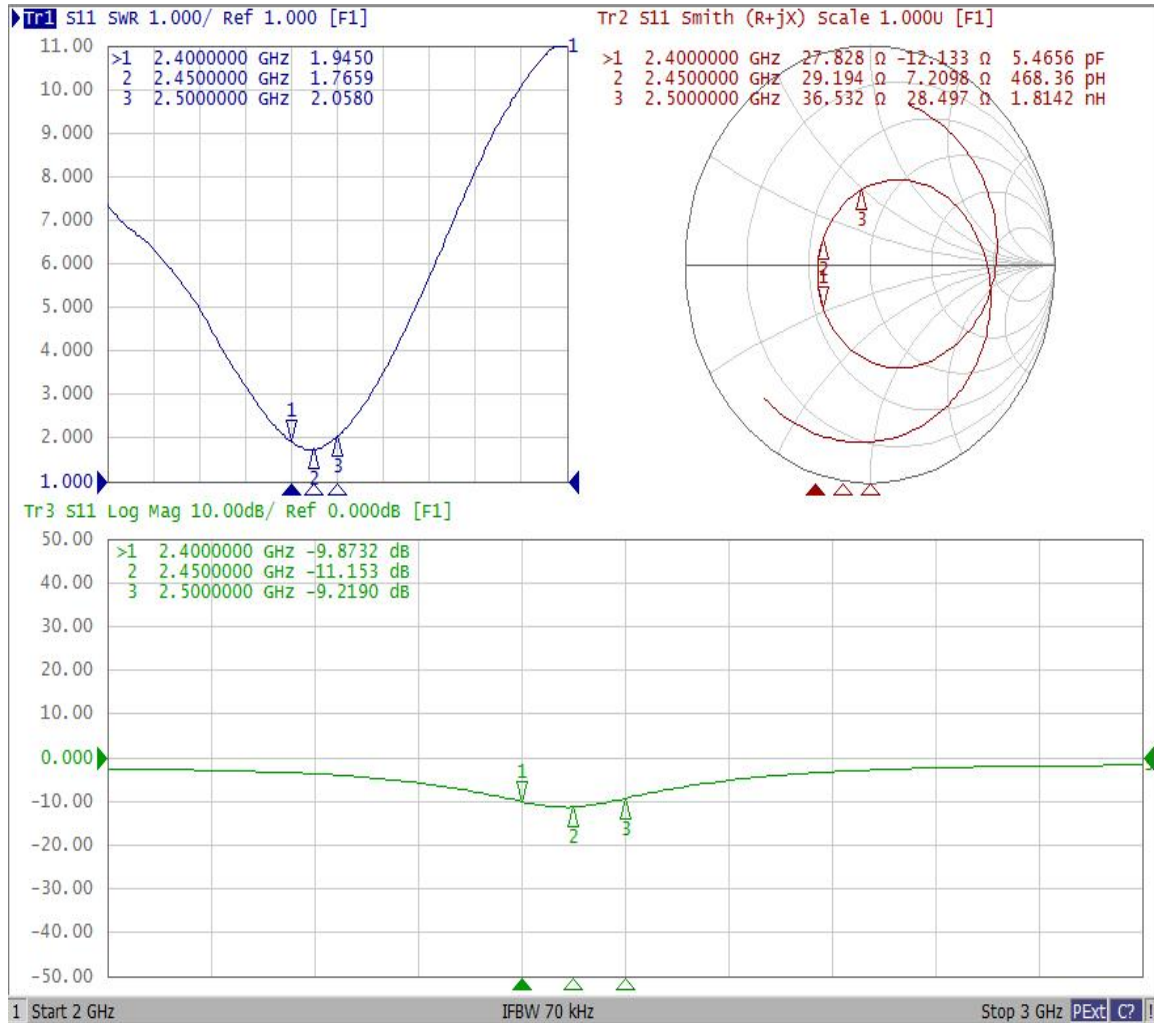




8.2 Gain (dBi) and Total Efficiency (%)

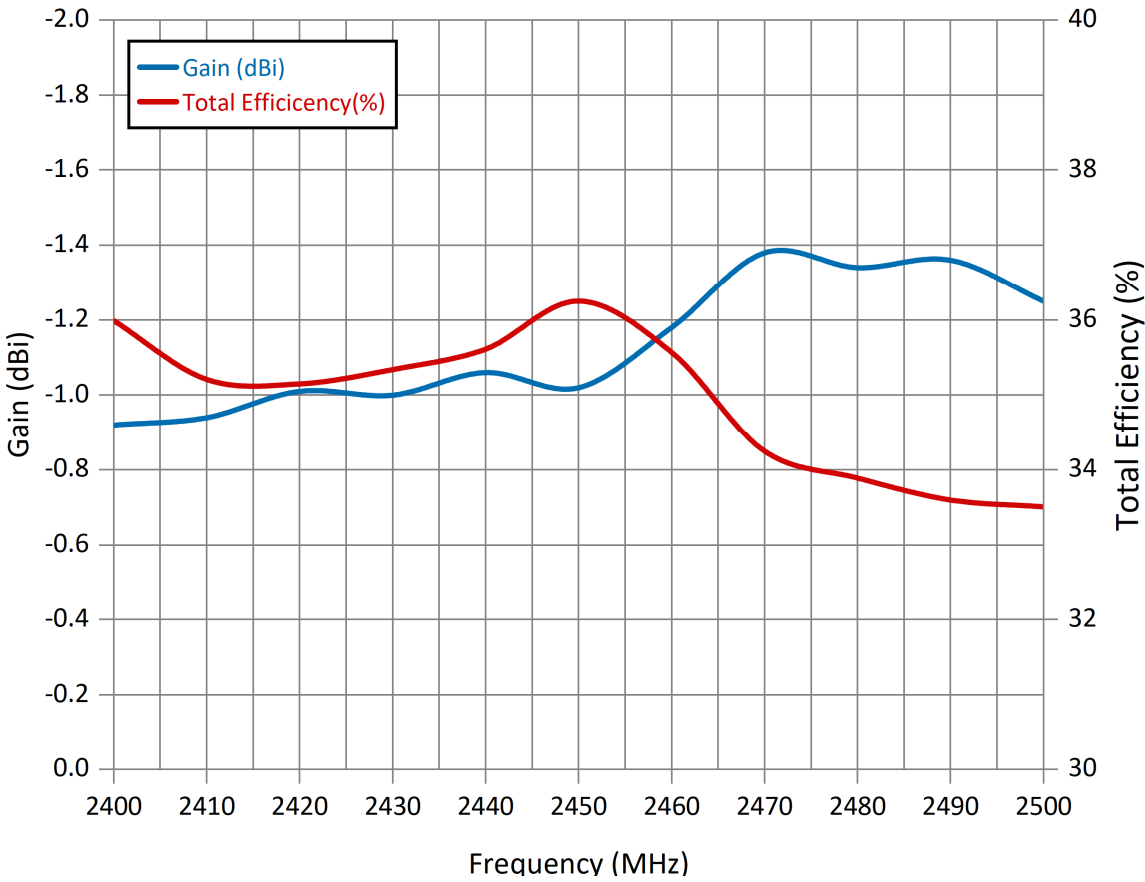

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	-0.92	35.99
2410	-0.94	35.21
2420	-1.01	35.15
2430	-1.00	35.34
2440	-1.06	35.61
2450	-1.02	36.25
2460	-1.18	35.57
2470	-1.38	34.25
2480	-1.34	33.89
2490	-1.36	33.60
2500	-1.25	33.51

8.3 Radiation Patterns (2.4-2.5 GHz)

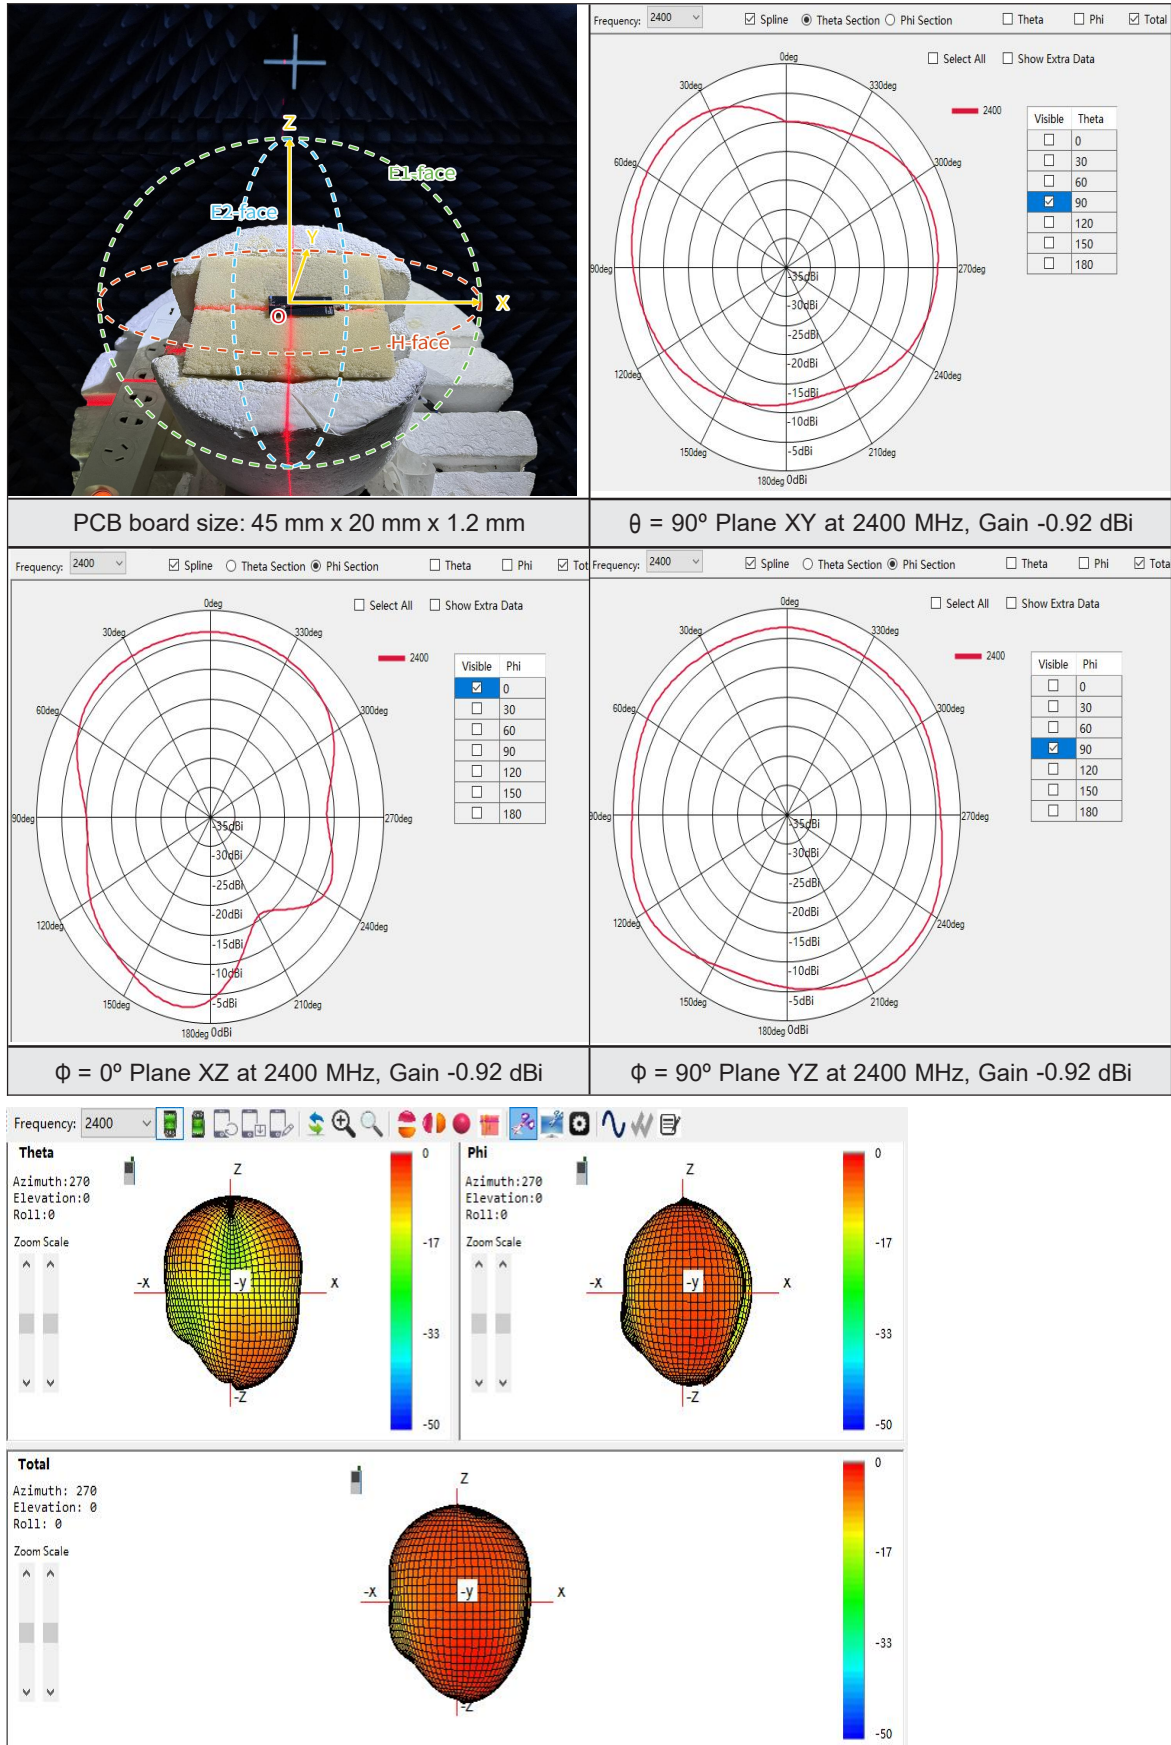






9 SOLDERING CONDITIONS

This antenna is suitable for lead free soldering.

The reflow duration should be adjusted to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260°C.

The figure below shows the temperature profile for soldering.

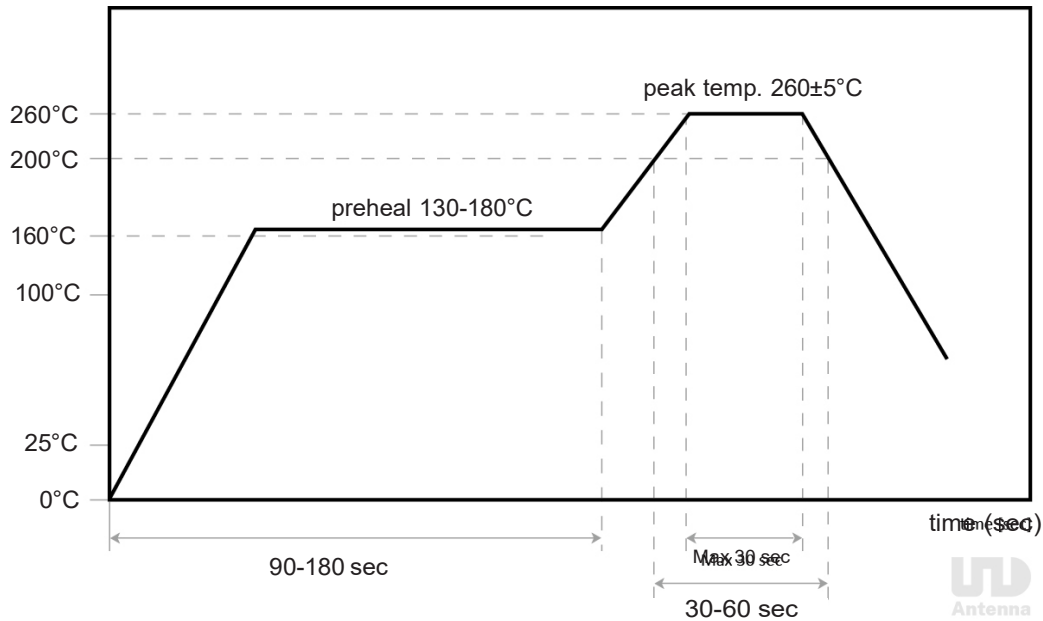

10 PACKAGING

10.1 Optimal Storage Conditions for Packaged Reels


Temperature	-5°C to 40°C
Humidity	Less than 70% RH
Shelf life	18 months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Reels should be stored in unopened sealed manufacturer's plastic packaging.

© Note

Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short-term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in the above table.

10.2Packagings and Dimensions (Unit: mm)


Minimum Ordering Quantity: 2000 pcs per reel.

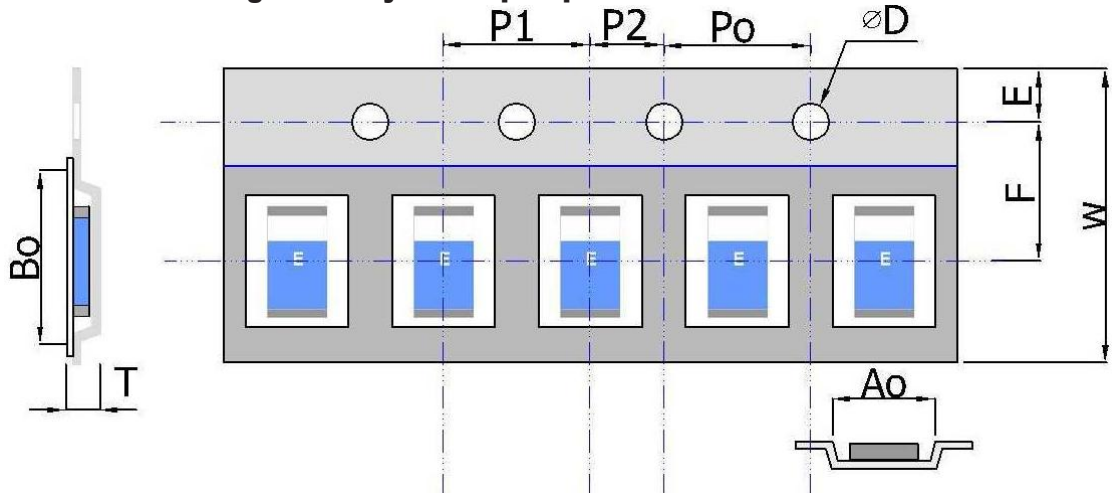

Plastic Tape specifications (unit :mm)

Index	Ao	Bo	ΦD	T	W
Dimension (mm)	1.95 ± 0.10	3.45 ± 0.10	1.55 ± 0.05	1.30 ± 0.10	$8.20 +0.10$ -0.30
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10

Reel dimensions

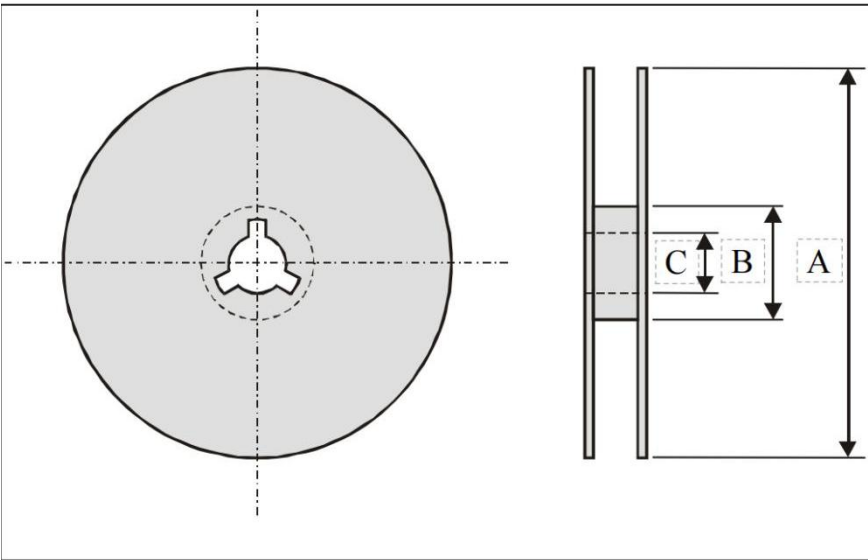

Index	A	B	C
Dimension (mm)	$\Phi 178$	$\Phi 60.0$	$\Phi 13.5$

Typing Quantity: 2000 pieces per 7" reel



11 ANTENNA CERTIFICATION

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACH Approval	Conform or declared [(EC)1907/2006]
Hazardous material regulation conformance: A certificate of conformance is available upon request. Feel free to consult us for details.	

12 WELCOME ALL ANTENNA OEM/ODM PROJECTS

About ABOOSTY



10+ years in
antenna R&D,
production, and
OEM/ODM



House of Aboosty:
1 M+ units annual
output capacity



Factory directly
competitive price



Industry-leading
quality levels



Professional
team-work &
support



Quick price
and lead time
estimation

Why Choose ABOOSTY



Innovative and
patented design
solutions



Full terminal
devices anechoic
chamber test



Co-location with
its custom



Competitive
price



Strict
inspection




Prompt reply
within 24h

What We Provide

OEM/ODM Services	
Light Customization	Deep Customization
• Logo • Packaging • Cables&Connectors	• In-depth tailoring for specific applications • Functional enhancements • Environmental adaptations • Vertical certifications • ...

Custom Process

Light Customization Process

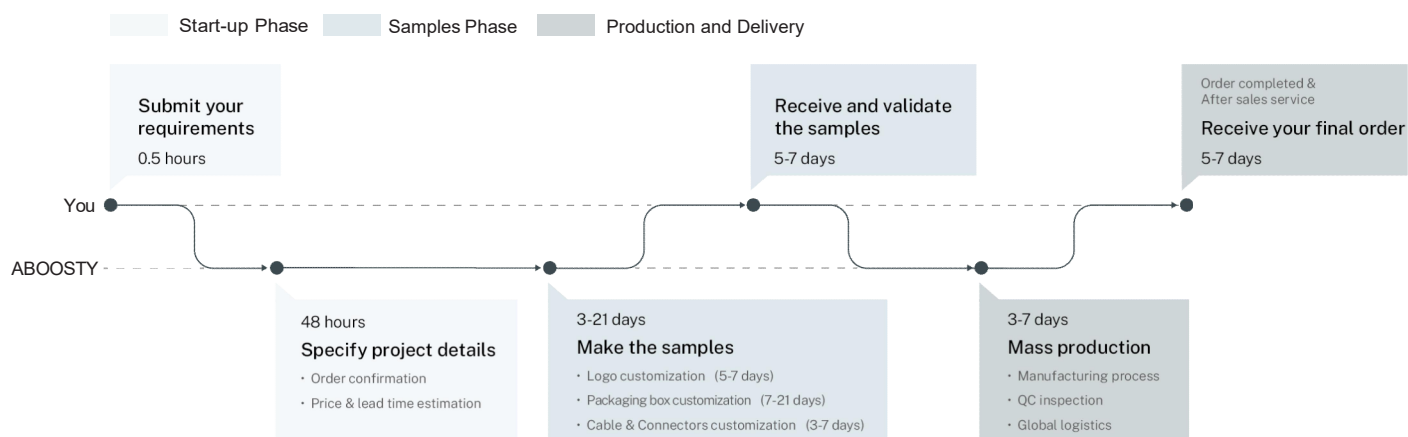



Deep Customization Process

